RO 510

Undercounters



Refrigeration and Freezing





home.liebherr.com


| | RO 510 |
|----------------------------------|-------------------------------------|
| Sound rating dB(A) | 39 |
| Refrigerator capacity cu.ft. (l) | 3.7 (104) |
| Electronic control | Touch electronic |
| Defrost type | Automatic |
| Interior light | LED lighting |
| Number of shelves | 4 |
| Shelves on telescopic rails | 1 |
| Shelf material | Glass |
| Number of door racks | 2 |
| Temperature range °F (°C) | 36 to 68°F (2 to 20°C) |
| Door Alarm | Acoustic |
| Safety Thermostat | Yes |
| Door type | Stainless steel |
| Integrated lock | Yes |
| Door hinges | Right, reversible |
| Product dimensions | |
| in inch (H / W / D) | 32 1/4" / 23 9/16" / 22 3/4" |
| in cm (H / W / D) | 81.8 / 59.7 / 57.7 |
| Cut out dimensions | |
| in inch (H / W / D) | 32 5/16 - 34 5/16 / 23 5/8 / 22 7/8 |
| in cm (H / W / D) | 82-87 / 60 / 58 |
| Net weight lbs. (kg) | 112.4 (51) |
| Voltage V / Hz | 115/60 |



| Accessories | |
|---------------------|--|
| - | - |
| | |
| Features | |
| | |
| LED | LED lighting is energy efficient, long-lasting, and maintenance-free. It illuminates the refrigerator to ensure that your foods are visible. |
| Telescopic Rails | Telescopic rails a self-closing system for drawers and shelves, ensures easy and convenient handling. |
| ADA Compliant | ADA compliant, designed to fit under counter heights between 32" and 34". |


Diagrams

Outdoor Refrigerator



To prevent possible ignition, designed ventilation is required.

It is recommended to install the appliance in a sheltered area, avoiding direct contact with extreme weather. Avoid placing the appliance in direct sunlight or near the stove, range top, radiators and similar heat sources. The appliance is designed for a freestanding and built-in installation.

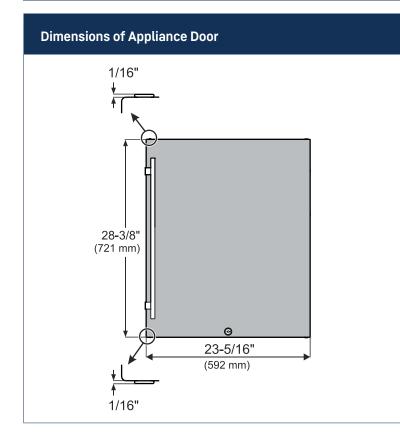


Side view 32-1/8" (816 mm) 3-3/4" (95 mm)

Appliance Dimensions

Height when adjustable feet have been screwed in as far as they will go

Delivery status = feet approx. 1/8" unscrewed.

Maximum height adjustment = 2" (51 mm)



Top view

Subject to modification. For up-to-date information, visit home.liebherr.com Specifications are for planning purposes only. For more detailed information, refer to installation instructions or Design Guide.