POD302W 30-INCH DOUBLE BUILT-IN OVEN

PROFESSIONAL SERIES











Home Connect

FEATURES & BENEFITS

- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility—standard or flush installation into kitchen cabinets
- Commercial style rotisserie with 12 pound capacity
- Multi-point Meat Probe to better capture temperature in roast and poultry
- Fast 2-hour self clean mode
- Fast preheat (around 7 minutes)

ACCESSORIES (INCLUDED)

Upper Cavity: 3 Telescopic Racks, Multi-point Meat Probe, Max Broil Pan, Rotisserie; Lower Cavity: 1 Telescopic Rack and 2 Standard Oven Racks

GENERAL PROPERTIES

Heating Modes – Upper Cavity

(16) Bake, Broil, Max Broil, Roast, Convection Bake, Convection Broil, Max Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast, Rotisserie

Heating Modes - Lower Cavity

(13) Bake, Broil, Roast, Convection Bake, Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast

Sabbath		Yes		
Cleaning Type	Upper Cavity Lower Cavity	Easy Clean, Self Clean Easy Clean, Self Clean		
Telescopic Rack(s)		4		
Illumination Type	Upper Cavity Lower Cavity			
Interior Lights	Upper Cavity Lower Cavity	2 2		
Home Connect® (Wi-Fi Enabled)		Yes		

OVEN PERFORMANCE		
Bake / Broil Element		2,400 / 3,800 / 1,000 W 2,400 / 3,800 W
Convection Element	Upper Cavity Lower Cavity	

Watts 9,600 W Circuit Breaker 40 A Volts 240 / 208 V Frequency 60 Hz	TECHNICAL DETAILS	
Volts 240 / 208 V	Watts	9,600 W
	Circuit Breaker	40 A
Frequency 60 Hz	Volts	240 / 208 V
	Frequency	60 Hz
Power Cord Length 60"	Power Cord Length	60"
Plug Type Fixed Connection, No Plug	Plug Type	Fixed Connection, No Plug
Conduit 60" 4-Wire	Conduit	60" 4-Wire
Energy Source Electric	Energy Source	Electric

. 37		
DIMENSIONS & WEIGHT		
Overall Appliance Dimensions (HxWxD)		52 1 / 16 " × 29 3 / 4 " × 24 1 / 2 "
Trim Overlaps (Top – Sides – Bottom)		3/8" to 2" -9/16" - 0"
Required Cutout Size (HxWxD) – Standard		50"-51 ¹ / 2 " × 28 ¹ / 2 " × 23 ¹ / 2 "
Required Cutout Size (HxWxD) – Flush		52 3/₁₆ " × 30" × 24 1/₂ "
, , , , , , , , , , , , , , , , , , , ,	oer Cavity ver Cavity	4.5 cu. ft. 4.5 cu. ft.
Overall Oven Interior Dimensions (HxWxD)		17 3/4 " × 24" × 17 7/8 "
Usable Oven Interior Dimensions (HxWxD)		13 1/2 " x 21 5/8 " x 16 1/4 "
Net Weight		341 lbs
WARRANTY		

2 Year

Page 1 of 3 5 / 23


Limited Warranty Parts and Labor


POD302W 30-INCH DOUBLE BUILT-IN OVEN

PROFESSIONAL SERIES



30-INCH DOUBLE OVEN

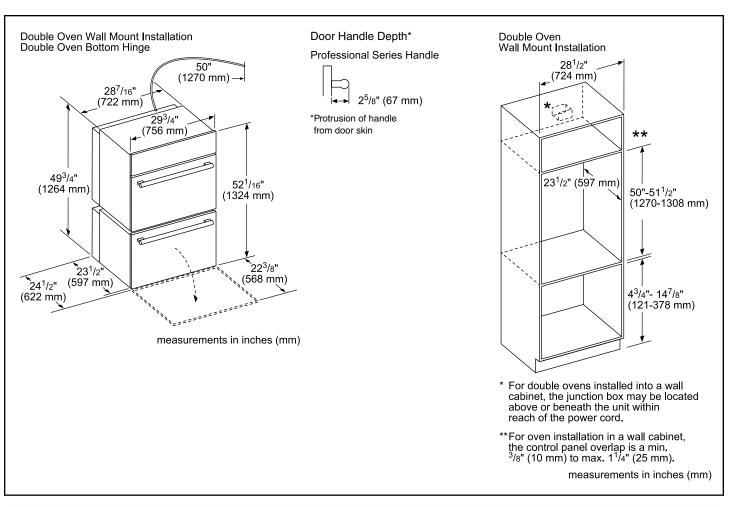

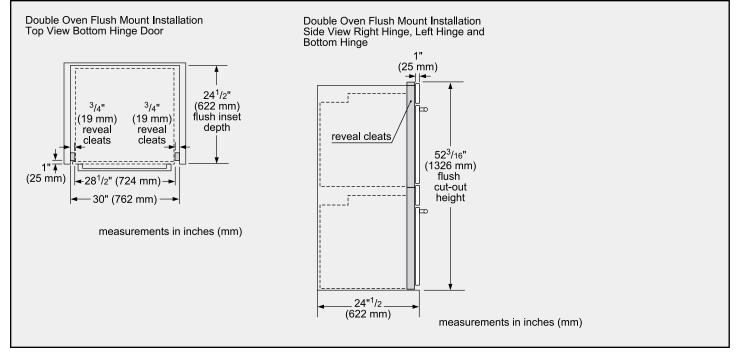


Page 2 of 3 5 / 23


POD302W 30-INCH DOUBLE BUILT-IN OVEN





INSTALLATION DETAILS

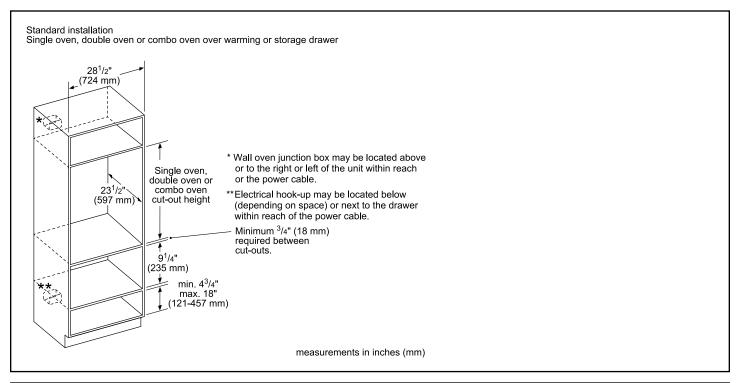

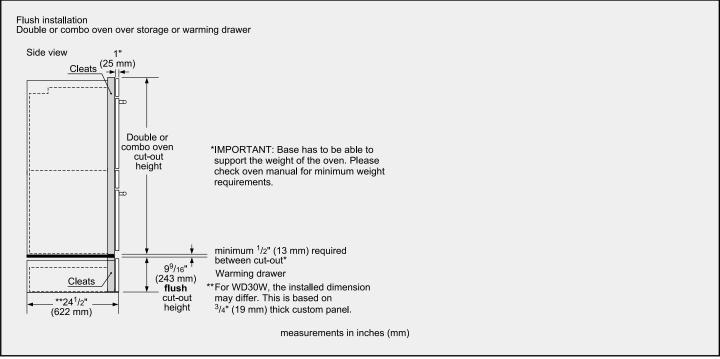

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

 $1\,800\,735\,4328 \mid USA\,THERMADOR.COM\mid CANADA\,THERMADOR.CA\mid @2023\,BSH\,HOME\,APPLIANCES\,CORPORATION.\,ALL\,RIGHTS\,RESERVED.$

Page 3 of 3 5 / 23