



#### **FEATURES & BENEFITS**

- Personalize your selection by altering ground size, temperature, cup size and aroma settings or chose from the 10 preset beverages.
- Enjoy freshly ground coffee for every cup with an exclusive Ceramic Disk Grinding System. Ceramic Disks deliver quality performance and minimize noise allowing for a smooth, consistent texture and flavor in every cup.
- Coffee customization settings store up to 8 personalized beverages with names so family members and houseguests can program their favorite drinks – from a single shot espresso, to tea, to extra-large cappuccinos.
- Cleanup has never been easier. Using both hot water and steam, the machine features a fully automatic rinse program at turn-on and turn-off, so it's always ready for the next fresh-tasting pour.
- Wifi equipped offerings include Playlist feature enabling you to place everyone's order in the Home Connect® app and let your coffee machine handle the rest.

#### ACCESSORIES - INCLUDED

Stainless Steel Milk Container, Measuring Spoon, 1 Water Hardness Test Strip, **3**/**8**" Adapter, Red Hose Guide

ACCESSORIES - OPTIONAL	
30" Stainless Steel Trim Kit	TCMTK30RS
Stainless Steel Milk Container	11005967
1 Lb. Bean Container	11015223
Water Filter	12008246
Descaling Tablets	00573828
Cleaning Tablets	00573829

#### **GENERAL PROPERTIES**

Modes: Ristretto, Espresso, Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caffè Latte, Milk Froth, Warm Milk, Hot Water, Steam Clean, Clean, Descaling

Settings: One or Two Cups, Adjustable Cup Sizes, Brewing Temperature, Coffee Strength, Grind Adjustment


Programming: Personalized Beverages, Language, Light and Display Brightness, Water Hardness, Temperature, Time, Demo Mode, Child-proof Lock, Key Sounds

Sensor Alerts: Water Level, Bean Container, Drip	Tray, Coffee Grounds
Beverages Available	10 (28 with Home Connect®)
Coffee Sizes	15
Memory Beverages	8
Double Cup Option	Yes
Coffee Strength Adjustment	6 Levels
Built-in Water Filter	Yes
Automatic Cleaning	Yes
Water Container Capacity (gal.)	5/8 gallon
Bean Container	1 lb. (16 oz.)
Powder Coffee	2 Scoops
Stainless Steel Milk Container (17 oz.)	Sealable
Home Connect® (Wi-Fi Enabled)	Yes
DESIGN ELEMENTS	
Display	Multilingual TFT Color Screen
Beverage Dispenser	Adjustable to Fit Tall Cups
Flush Installation	Yes
TECHNICAL DETAILS	
TECHNICAL DETAILS Watts (W)	1,600 W
	1,600 W 15 A
Watts (W)	
Watts (W) Circuit Breaker (A)	15 A
Watts (W) Circuit Breaker (A) Current (A)	15 A 10 V
Watts (W) Circuit Breaker (A) Current (A) Volts (V)	15 A 10 V 120 V NEMA 5-15R, 2-Pole
Watts (W) Circuit Breaker (A) Current (A) Volts (V) Plug Type	15 A 10 V 120 V NEMA 5-15R, 2-Pole 3-Wire Grounding
Watts (W) Circuit Breaker (A) Current (A) Volts (V) Plug Type Power Cord Length (in.)	15 A 10 V 120 V NEMA 5-15R, 2-Pole 3-Wire Grounding 39"
Watts (W) Circuit Breaker (A) Current (A) Volts (V) Plug Type Power Cord Length (in.) Drain Hose Length (in.)	15 A 10 V 120 V NEMA 5-15R, 2-Pole 3-Wire Grounding 39" 67" 65" (extendable** by
Watts (W) Circuit Breaker (A) Current (A) Volts (V) Plug Type Power Cord Length (in.) Drain Hose Length (in.) Water Inlet Length (in.)	15 A 10 V 120 V NEMA 5-15R, 2-Pole 3-Wire Grounding 39" 67" 65" (extendable** by stretching to 118")
Watts (W)Circuit Breaker (A)Current (A)Volts (V)Plug TypePower Cord Length (in.)Drain Hose Length (in.)Water Inlet Length (in.)Drain Hose Inlet Diameter	15 A 10 V 120 V NEMA 5-15R, 2-Pole 3-Wire Grounding 39" 67" 65" (extendable** by stretching to 118") <b>3/4</b> "
Watts (W)Circuit Breaker (A)Current (A)Volts (V)Plug TypePower Cord Length (in.)Drain Hose Length (in.)Water Inlet Length (in.)Drain Hose Inlet DiameterEnergy Source	15 A 10 V 120 V NEMA 5-15R, 2-Pole 3-Wire Grounding 39" 67" 65" (extendable** by stretching to 118") 3/4" Electric
Watts (W)Circuit Breaker (A)Current (A)Volts (V)Plug TypePower Cord Length (in.)Drain Hose Length (in.)Water Inlet Length (in.)Drain Hose Inlet DiameterEnergy SourcePump Pressure (Bar)	15 A 10 V 120 V NEMA 5-15R, 2-Pole 3-Wire Grounding 39" 67" 65" (extendable** by stretching to 118") 3/4" Electric
Watts (W)Circuit Breaker (A)Current (A)Volts (V)Plug TypePower Cord Length (in.)Drain Hose Length (in.)Water Inlet Length (in.)Drain Hose Inlet DiameterEnergy SourcePump Pressure (Bar)DIMENSIONS & WEIGHT	15 A 10 V 120 V NEMA 5-15R, 2-Pole 3-Wire Grounding 39" 67" 65" (extendable** by stretching to 118") 3/4" Electric 275 psi (19 bar)
Watts (W)Circuit Breaker (A)Current (A)Volts (V)Plug TypePower Cord Length (in.)Drain Hose Length (in.)Water Inlet Length (in.)Drain Hose Inlet DiameterEnergy SourcePump Pressure (Bar)DIMENSIONS & WEIGHTOverall Appliance Dimensions (HxWxD) (in)	15 A 10 V 120 V NEMA 5-15R, 2-Pole 3-Wire Grounding 39" 67" 65" (extendable** by stretching to 118") 3/4" Electric 275 psi (19 bar) 17 7/8" x 23 3/8" x 14"*

\*Not including transformer

\*\*Drain hose can be shortened but not extended by combining two hoses. Some length must be allowed for the machine to be pulled out for service

#### **COFFEE MACHINE & CUTOUT DIMENSIONS**

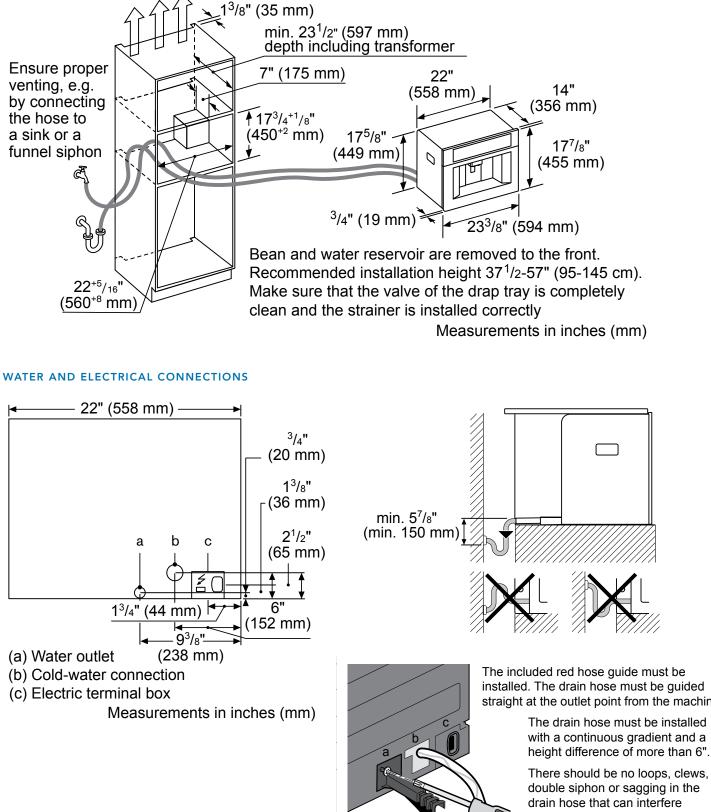




straight at the outlet point from the machine. The drain hose must be installed


with a continuous gradient and a height difference of more than 6".

double siphon or sagging in the drain hose that can interfere with water flow or cause water accumulation in the drain hose.

## FLUSH INSTALL WITH OPTIONAL 30-INCH TRIM KIT TCMTK30RS


inches (mm)

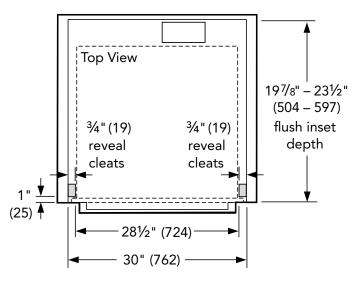



**NOTE:** \* Flush installation requires a 5/16" (8 mm) high x  $28\frac{1}{2}$ " (724 mm) wide x  $22\frac{1}{2}$ " (571 mm) deep baseplate underneath the unit body.

# CUTOUT DIMENSIONS WITH OPTIONAL 30-INCH TRIM KIT TCMTK30RS

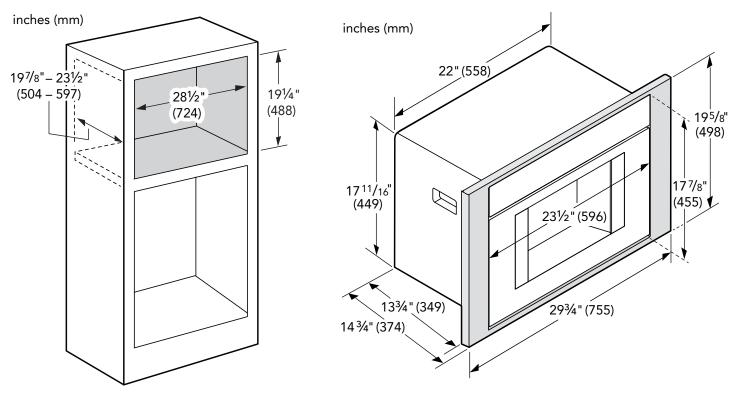




**Top View** 

<sup>3</sup>/4" <u>▼</u> (19) **▼** 

#### FLUSH INSTALL

Side View



measurements in inches (mm)

measurements in inches (mm)

Transformer

22" (558)

24" (610)

1" (25)

reveal

cleats

1" (25)

reveal

cleats

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | @2023 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.



24<sup>1</sup>/2" (622) flush

insert

depth